

# Art. 16/B

Rubinetto a galleggiante silenzioso ad attacco alto, filetto 21×1 per cassette ad incasso.

Noiseless float valve with high connection threaded 21×1 FOR BUILT-IN TANK.

**SCHEDE TECNICHE**  
TECHNICAL INFO

Made in Italy



**Pressione massima di esercizio consigliata**

Maximum recommended working pressure

bars


5

**Temperatura massima dell'acqua consigliata**

Maximum recommended working temperature

C°

60

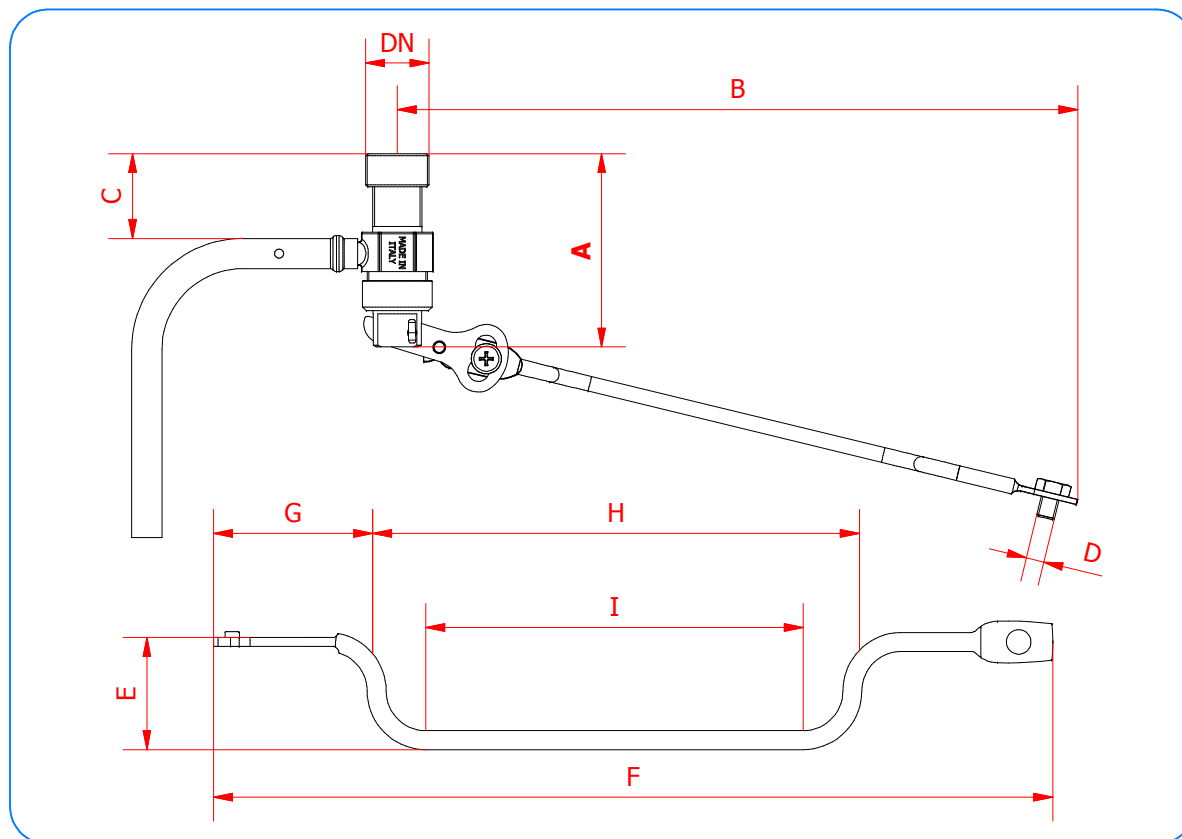

**Materiali - Materials**

CW614N UNI EN 12164	CW617N UNI EN 12165	CW508L UNI EN 12166	NBR
------------------------	------------------------	------------------------	-----

**Sfere consigliate -**

Dimension ball recommended

<b>ART. 16/B</b>	<b>21X1</b>
art.19.3	90
art.19.6	90

## Misure di ingombro - Overall dimensions (mm)

Art.	DN	A	B	C	D	E	F	G	H	I
16/B	21X1	64	225	28	1/4"W	29	220	42	128	100